

ARCHEOLOGIA E CALCOLATORI

34.1

2023

All'Insegna del Giglio

ARCHEOLOGIA E CALCOLATORI



CNR – DIPARTIMENTO SCIENZE UMANE E SOCIALI, PATRIMONIO CULTURALE

ISTITUTO DI SCIENZE DEL PATRIMONIO CULTURALE

Rivista annuale open access e peer reviewed
fondata da Mauro Cristofani e Riccardo Francovich
già diretta da Paola Moscati (1990-2022)

Comitato Scientifico: Paola Moscati (coordinatore), Giovanni Azzena, John Boardman, Robin B. Boast, Francisco Burillo Mozota, Alessandra Caravale, Christopher Carr, Martin O.H. Carver, Francesco D'Andria, François Djindjian, James E. Doran, Virginie Fromageot-Laniepce, Salvatore Garraffo, Filippo Giudice, Antonio Gottarelli, Maria Pia Guermandi, Anne-Marie Guimier-Sorbets, Ian Hodder, F. Roy Hodson, Stephen Kay, Donna C. Kurtz, Adriano Maggiani, Daniele Manacorda, Costanza Miliani, Tito Orlandi, Clive R. Orton, Maria Cecilia Parra, Alessandra Piergrossi, Xavier Rodier, Francesco Roncalli, Grazia Semeraro, Paolo Sommella, Gianluca Tagliamonte, Marco Valenti

Direttore responsabile: Alessandra Caravale

Redazione: Claudio Barchesi, Francesca Buscemi, Letizia Ceccarelli, Sara Di Marcello, Irene Rossi

Policy and Guidelines: <http://www.archcalc.cnr.it/pages/guidelines.php>

Autorizzazione del presidente del Tribunale di Firenze n. 3894 del 6/11/1989

Indirizzo Redazione: Rivista «Archeologia e Calcolatori», CNR – ISPC, Area della Ricerca di Roma 1, Via Salaria Km 29,300, 00015 Monterotondo Stazione (RM)
Tel. +39.06.90672670 – Fax +39.06.90672818
E-mail: redazioneac.ispc@ispc.cnr.it
<http://www.archcalc.cnr.it/>

Edizione e distribuzione: Edizioni ALL'INSEGNA DEL GIGLIO s.a.s.,
Via Arrigo Boito 50-52, 50019 Sesto Fiorentino (FI)
Tel. +39.055.6142675
E-mail: redazione@insegnadelgiglio.it – ordini@insegnadelgiglio.it
<https://www.insegnadelgiglio.it/>

ARCHEOLOGIA E CALCOLATORI

34.1

2023

All'Insegna del Giglio

Realizzazione grafica della sovracoperta di Marcello Bellisario
Rivista «Archeologia e Calcolatori» (ISSN 1120-6861, e-ISSN 2385-1953)
ISBN 978-88-9285-204-4, e-ISBN 978-88-9285-205-1
© 2023 – All’Insegna del Giglio s.a.s. – www.insegnadelgiglio.it
Sesto Fiorentino (FI), luglio 2023
Stampa, MDF print

Abbonamento 2023: 2 volumi, 34.1 e 34.2, € 60,00.
Spedizione: Italia, gratuita; estero, a carico del destinatario.
<https://www.insegnadelgiglio.it/categoria-prodotto/abbonamenti/>

INDICE

ARCHEOFOSS 2022. PROCEEDINGS OF THE 16 TH INTERNATIONAL CONFERENCE ON OPEN SOFTWARE, HARDWARE, PROCESSES, DATA AND FORMATS IN ARCHAEOLOGICAL RESEARCH (ROME, 22-23 SEPTEMBER 2022), edited by JULIAN BOGDANI, STEFANO COSTA	
JULIAN BOGDANI, STEFANO COSTA, <i>Introduction</i>	11
STEFANO COSTA, <i>The Harris Matrix Data Package specification and the new init command of the Python hmdp tool</i>	15
EMANUEL DEMETRESCU, CRISTINA GONZALEZ-ESTEBAN, FILIPPO SALA, <i>EMdb: yet another db for the stratigraphic record</i>	21
ANNALISA D'ONOFRIO, MARIA RAFFAELLA CIUCCARELLI, <i>Il contesto urbano del teatro romano e l'area dell'ex Filanda Bosone a Fano (PU)</i>	31
MARCO MODERATO, VASCO LA SALVIA, <i>pyArchInit at Castelseprio: progressive adoption of an integrated managing system for archaeological field data</i>	39
GUIDO ANTINORI, MARCO RAMAZZOTTI, FRANCESCO GENCHI, <i>MASPAG & pyArchInit, the newborn collaboration of Sapienza and adArte in the Sultanate of Oman</i>	49
ELEONORA MINUCCI, ANGELA BOSCO, DANIELE DE LUCA, <i>Virtual RTI application on 3D model for documentation of ancient graffiti: proposal of a methodology for complex archaeological sites</i>	59
LAURA CARPENTIERO, DORA D'AURIA, <i>Operative tools for BIM in archaeology: libraries of archaeological parametric IFC objects</i>	69
FEDERICA RINALDI, ALESSANDRO LUGARI, FRANCESCA SPOSITO, ASCANIO D'ANDREA, <i>Archeology and conservation. Digital tools as digital bridges between disciplines: the risk map of the in situ mosaic and marble floor surfaces of the Parco Archeologico del Colosseo</i>	77
SIMON HOHL, THOMAS KLEINKE, FABIAN RIEBSCHLÄGER, JULIANE WATSON, <i>iDAI.field: developing software for the documentation of archaeological fieldwork</i>	85
ELEONORA IACOPINI, <i>Punto Zero, una nuova web application per la gestione e l'informatizzazione dei dati di archivio. Il caso di Ancona</i>	95
FLORIAN THIERY, <i>Linked Open Ogham. How to publish and interlink various Ogham Data?</i>	105
GAËLLE COQUEUGNIOT, VIRGINIE FROMAGEOT-LANIEPCE, <i>On the road to open access: insights from French antiquity journals and databases</i>	115

ALAIN QUEFFELEC, BRUNO MAUREILLE, MARTA ARZARELLO, RUTH BLASCO, OTIS CRANDELL, LUC DOYON, SIÂN HALCROW, EMMA KAROUNE, AITOR RUIZ-REDONDO, PHILIP VAN PEER, <i>Peer Community In Archaeology: a community-driven free and transparent system for preprints peer-reviewing</i>	125
NICOLÒ PARACIANI, IRENE ROSSI, <i>IADI: an open Interactive Atlas of Digital Images for the journal «Archeologia e Calcolatori»</i>	135
FRANCESCA BUSCEMI, MARIANNA FIGUERA, GIOVANNI GALLO, ANGELICA LO DUCA, ANDREA MARCHETTI, <i>Sharing structured archaeological 3D data: open source tools for artificial intelligence applications and collaborative frameworks</i>	145
FLORIAN THIERY, PETER THIERY, <i>Challenges in research community building: integrating Terra Sigillata (Samian) research into the Wikidata community</i>	157
MARIFLORA CARUSO, PAOLA LA TORRE, ROBERTA MANZOLLINO, <i>La valorizzazione dei musei locali attraverso Wikipedia: il progetto MedAniene</i>	165
MARIA CARINA DENG, <i>The road (not) taken. Reconstructing pre-modern roads in Viabundus. Methods and opportunities</i>	175
GABRIELE CICCONE, <i>From the Itinerarium Antonini and al-Idrisi to the movecost plugin: road network analysis in the Castronovo di Sicilia area</i>	183
PAOLO ROSATI, <i>“ArchaeoGIS” a QGIS plugin for archaeological spatial analysis</i>	193
JULIAN BOGDANI, DOMIZIA D’ERASMO, <i>Backward engineering historical maps: the update of the open hydrography dataset of Napoleonic cartography</i>	201
 MODELLING THE LANDSCAPE. FROM PREDICTION TO POSTDICTION. PROCEEDINGS OF THE INTERNATIONAL SESSION AT 7 TH LANDSCAPE ARCHAEOLOGY CONFERENCE (IAȘI, 10-15 SEPTEMBER 2022), edited by CARLO CITTEr, AGOSTINO SOTGIA	
AGOSTINO SOTGIA, CARLO CITTEr, <i>Modelling the landscape. From prediction to postdiction</i>	213
ANOOSHE KAFASH, MASOUD YOUSEFI, ELHAM GHASIDIAN, SAMAN HEYDARI- GURAN, <i>Reconstruction of Epipaleolithic settlement and “climatic refugia” in the Zagros Mountains during the Last Glacial Maximum (LGM)</i>	217
GIACOMO BILOTTI, <i>Balancing between biases and interpretation. A predictive model of prehistoric Scania, Sweden</i>	225
GIOVANNA PIZZIOLo, <i>From legacy data to survey planning? The relationship between landscape and waterscape in Southern Tuscany during the Upper Palaeolithic: towards a predictive-postdictive approach</i>	237

SANDRO CARACAUSI, SARA DAFFARA, GABRIELE L.F. BERRUTI, EUGENIO GAROGLIO, MARTA ARZARELLO, FRANCESCO RUBAT BOREL, <i>Lo studio di siti archeologici di alta quota: metodologia e risultati del modello predittivo in ambiente GIS applicato nelle Valli di Lanzo (Piemonte, Italia)</i>	247
LAURA BURIGANA, <i>Food, distance and power. Modeling a multi-factor proto- historic landscape in the Po plain</i>	257
AGOSTINO SOTGIA, <i>A predictive model to investigate the agro-pastoral exploitation of ancient landscapes</i>	267
MARCO CABRAS, CRISTINA CONCU, PAOLO FRONGIA, RICCARDO CICILLONI, <i>Testare sul campo la Least Cost Path Analysis: riflessioni intorno ai paesaggi dell'età del Bronzo della Sardegna centro-meridionale (Italia)</i>	279
ANDRÁS BÖDŐCS, <i>Roman land use and its impact on the Pannonian landscape</i>	289
VINCENZO RIA, RAFFAELE RIZZO, <i>The Roman limes in Germania Inferior: a GIS application for the reconstruction of landscape</i>	299
PEDRO TRAPERO FERNÁNDEZ, <i>Modelo predictivo de aprovechamientos vitivinícolas. La colonia romana de Hasta Regia, Hispania</i>	311
CARLO CITTER, YLENIA PACIOTTI, <i>Shaping a juridical district: a postdictive approach</i>	321
ANGELO CARDONE, <i>Spatial analysis as a tool for field research. Case-studies in progress for urban and landscape contexts</i>	329
CHIARA MASCARELLO, <i>How to reconstruct the human mobility in mountainous area. A case from North-Eastern Italy</i>	341

ARCHEOFOSS 2022
PROCEEDINGS OF THE 16TH INTERNATIONAL
CONFERENCE ON OPEN SOFTWARE, HARDWARE,
PROCESSES, DATA AND FORMATS
IN ARCHAEOLOGICAL RESEARCH
(ROME, 22-23 SEPTEMBER 2022)

edited by
Julian Bogdani, Stefano Costa

VIRTUAL RTI APPLICATION ON 3D MODEL FOR DOCUMENTATION OF ANCIENT GRAFFITI: PROPOSAL OF A METHODOLOGY FOR COMPLEX ARCHAEOLOGICAL SITES

1. INTRODUCTION

The following work was made possible by the collaboration between the Department Asia, Africa e Mediterraneo (DAAM) of the University of Naples L'Orientale and the inter-university Consortium CINECA, represented by the authors¹. The project is about the creation of a virtual dome for RTI acquisition and has two main aims: to make possible simple RTI acquisitions in difficult environmental contexts, and to reuse for new research high-resolution three-dimensional surveys acquired for other purposes. As part of a major international project, high-resolution 3D models of the Catacombs of San Gennaro in Naples are available (<https://skfb.ly/ozSsA>). Among these, the present contribution analyses a frescoed niche characterised by innumerable engravings on the entire surface of the *arcosolium*. The research highlights how the combination of two different open source applications, one made for cultural heritage (RTI Builder), the other one for graphic modelling (Blender), is a valid support for archaeological analysis allowing the reuse of previous 3D data for graffiti identification. It also highlighted how the result of the V-RTI strictly depends on the resolution of the 3D model used. Finally, we underline what are the potentiality and the limits of these applications, to improve methods and practical application in a complex site such as the Catacombs of San Gennaro.

2. RTI METHODOLOGY

Reflectance Transformation Imaging (RTI), as defined by the non-profit organisation “Cultural Heritage Imaging”, which is behind the development of the RTI Builder and Viewer software and of the related methodology, is «a computational photographic method that captures a subject’s surface shape and colour and enables the interactive re-lighting of the subject from any direction» in a viewer, revealing details not visible with the naked eye» (CHI 2014). RTI images, in addition to RGB colour information, record surface normals for each pixel; each value, corresponding to a point on the

¹ A.B. and E.M. conceived of the presented research and verified the analytical methods. D.D.L. developed the Virtual Dome and performed the computations. E.M. performed research activities for the state of the art and methodology. A.B. supervised the findings of this work. All authors discussed the results and contributed to the final manuscript.

object, stores information on the angle of reflectance of light coming from any direction at that point.

The RTI methodology is a reliable and widely used tool for archaeological research, in particular for the analysis of a wide range of artefacts, such as for the interpretation of graffiti and engravings and for the recording of the maintenance phases of objects, paintings or frescoes. It also enables the documentation of particular data that are difficult to visualise with the naked eye and facilitates the recognition of traces and marks on the surface of objects. One of the most widely used acquisition methodology in archaeology is the so-called Highlight Based RTI (H-RTI). It is characterised by its simplicity of use as it only requires easily transportable and low-cost equipment like a camera, a tripod and an external light source.

The H-RTI uses one or two reflective targets (usually a dark-coloured sphere) in each frame at the same position within the image frame to calculate the position of the light directly from the reflection on the sphere (EARL *et al.* 2010; DUFFY 2013). It is important for the subject to be illuminated in the round by several light positions with illumination angles between 15° and 65°. For an appropriate acquisition, the camera should maintain a fixed framing while the light source will be moved in each precise angle. By applying this technique in our case study, we unfortunately run into the problem of accidental vibrations transmitted to the camera, which have a significant effect on the framing and compromised the sharpness of the RTI images.

The arrangement of light sources also has an impact on the quality of the acquired RTI data. Ideally, the positions of the lights should be evenly spaced and it is recommended to keep the source of the light at a constant distance from the surface of the subject, i.e., of two to four times the diagonal of the area to be recorded. Through the use of a RTI dome, in which each position of the light is provided by a different illumination source, it is possible to have acquisitions of great detail and precision. The so-called light-dome is equipped with a top hole for housing the camera and LEDs that allow the object to be illuminated from different points equidistant and synchronised with the camera shot. This methodology (D-RTI) is especially suitable for the acquisition of small objects and is, therefore, generally used in laboratories.

One of the main problems, both with the H-RTI methodology and also with the light-dome, lies in the size of the objects to be acquired. Images of larger objects must be acquired in smaller subsections, which increases the difficulty and duration of the process. Furthermore, an optimal H-RTI application requires full control of the recording environment and often the surveying “objects” are located in places that are difficult to reach or where it is extremely complex to plan an adequate RTI acquisition.



Fig. 1 – Elaboration process overview of the 3D point cloud of the Catacombs carried out in the framework of the acquisition project in 2019.

3. CASE STUDY

The evocative scenery of the Catacombs of San Gennaro was the location of an international research project focused on the 3D survey of the site, started in September 2019. The activities were funded by the private non-profit organisation GDH (Global Digital Heritage, USA), assisted by the Zamani Project (South Africa) and CISA (Centro Interdipartimentale di Servizi di Archeologia, of the University of Naples L'Orientale). In parallel with the ambitious digital survey activities of the entire hypogeum network, several H-RTI acquisitions were carried out in order to test the methodology for the documentation and analysis of graffiti and engravings (Fig. 1). The huge site of the Catacombs is developed on two non-overlapping levels of underground passages and tunnels and originates from a burial core dating back to the 2nd century CE, which was expanded during the 5th century thanks to the transfer of the remains of San Gennaro. The Catacombs became a place of pilgrimage and a favourite burial site for the population until the Saint's remains were removed in 831. From then on, the site was abandoned until the 18th century, when Naples became one of the destinations of the Grand Tour.

The multi-secular life of the site is perfectly verifiable and “readable” through countless engraved, graffitied, written and painted texts on numerous walls of the Catacombs, both above the decorations of the niches and *arcosolia*, and on portions of bare walls (BOSCO, MINUCCI 2020). These almost completely unpublished “signatures” cover a vast chronological span and represent an interesting tangible mark of the continuous passage of people

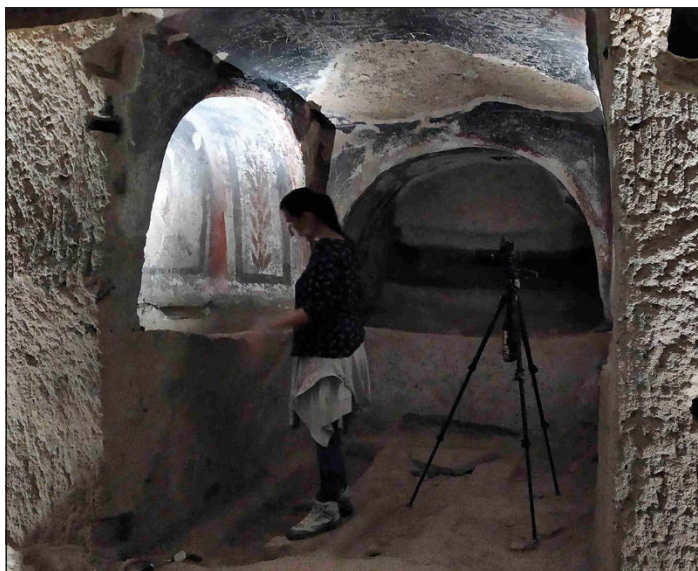


Fig. 2 – The niche with the *arcosolium* where the H-RTI acquisition test was performed.

from all over the world. Often, names, signs and dates are superimposed and distributed in such a chaotic manner that their identification and consequent reading are complex or impossible at all.

This context is still very impressive for visitors and represents a real challenge for the researchers because of several aspects. The main obstacle to their survey is the poor lighting, also made worse by the lack of sufficient electrical connections to bring in external light sources. Secondly, the small but highly articulated spaces complicate the acquisition process by requiring more operators and more equipment. Finally, the instability of the ground surfaces on which to fix the equipment often causes blur effects in the photos. Indeed, the tombs, excavated at floor level, greatly complicates the fixing of tripods necessary for acquisitions. Moreover, metal walkways that facilitate the passage of tourists are also very common. Such footpaths, although they overcome obstacles on the ground, cause considerable vibrations, which are detrimental to the photographic acquisitions.

Classical H-RTI methodology acquisition was applied for test on some *arcosolium* burials particularly characterised by graffiti. Unfortunately, it was not possible to respect the ideal angles of light emission, due to the shape of the burial which has a deep arc, thus creating an obstacle to the illumination of the back wall, and also for the narrow spaces, which several times caused

camera vibrations and restricted the operators' movements (Fig. 2). The final results were therefore not satisfactory, due to less accuracy and blur in some part/position of the object.

4. THE VIRTUAL RTI

The Catacombs project had, however, produced high-resolution three-dimensional surveys of the entire burial complex, combining photogrammetry and scanning acquisitions. Thanks to CINECA's work, it was possible to build a virtual dome in the open source software Blender. The idea is to operate Virtual Reflectance Transformation Imaging (hereinafter referred to as V-RTI), i.e., a hybrid method that combines 3D, virtual manipulation and 2D+ technologies in a workflow, partially carried out *in situ*, that is quick and intuitive (one only needs to be familiar with 3D modelling software) and suitable for the documentation of a wide range of archaeological monuments. The dome was recreated with characteristics reproducing as faithful as possible the real dome, so that the two environments could be comparable, but at the same time it was built to overcome the limitations of the “real” tool. Three-dimensional models generated with SfM, or other technology, are illuminated and then photographed in a virtual environment before being processed in the RTI Builder software. The first step was to

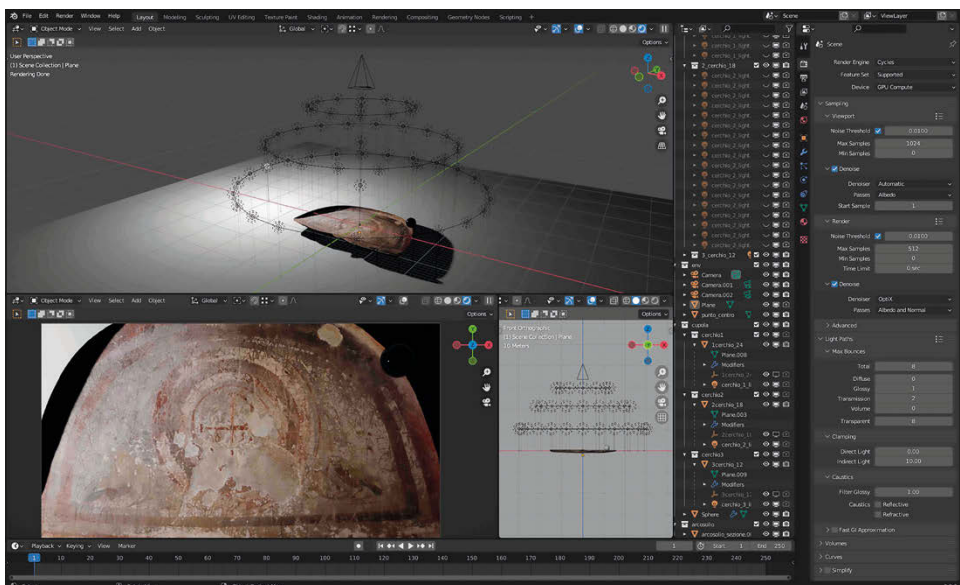


Fig. 3 – Screenshot of the 3D model with the Virtual Dome in Blender (minucci-bosco-de_luca 2022).

import the PLY file of the model into Blender. In the virtual environment the structure of the dome has been created, with three concentric levels of lights equidistant from each other.

The lights are omni-directional point type and have a power of 200W each, with a diameter of 0.03 metres. They were created as instanced copies to provide an easy way of future editing of their parameters. In the largest diameter level 24 lights were inserted, in the intermediate level 18 and the level with the highest angle of inclination had 12 lights. The target object was obtained by creating and positioning a primitive UV Sphere object, with a high level of geometry subdivisions in order to be as smooth as possible and also with smooth-shaded normals. The shader of this sphere was obtained with a glossy BSDF shader with a pure black diffuse colour and a level of roughness of 0.08, in a scale from 0 to 1 (Fig. 3).

The 3D camera was positioned at the centre of the dome, above the highest level of lights, with a focal length of 50 mm and generic 36×24 mm camera sensor, to mimic a real DLSR camera. The render engine used in this setup is “Cycles”, integrated in Blender, that allows to set every light bounce to 0 to avoid colour glare and optimise shadows. The target-sphere shadows were also disabled via the Cycles visibility options of the sphere object. By running the *ad hoc* Python script, to simulate the RTI acquisition phase, the system turns off every light and then turns on one at a time, calculates and stores the captured frame, turns everything off again and repeats the procedure for all the other lights. The dome was scalable according to the model dimension and it was possible to “clean” the 3D model to remove obstacles (such as the arch) to optimise the correct illumination of the object under analysis (in our case the *arcosolium*). The activation of the virtual capture process on the wall of the *arcosolium* produced images at a resolution of 3840×2160 pixels, exported in JPEG format with a low compression rate.

5. RTI PROCESSING

The resulting images were then processed with the open source RTI Builder software, applying the PTM (Polynomial Texture Mapping) process. The choice of this rendering is linked to the greater availability of filters that can be applied to the finished elaboration in the RTI Viewer. The comparison with the result of the process carried out *in situ* with H-RTI clearly shows the enhancement in the readability of the information, even with the application of the filters that the software provides. The improvement of the data acquisition procedure is immediately visible in the processing phase. Indeed, after the highlight detection within the images, the software carries out the processing and makes it possible to visualise all the light spots detectable

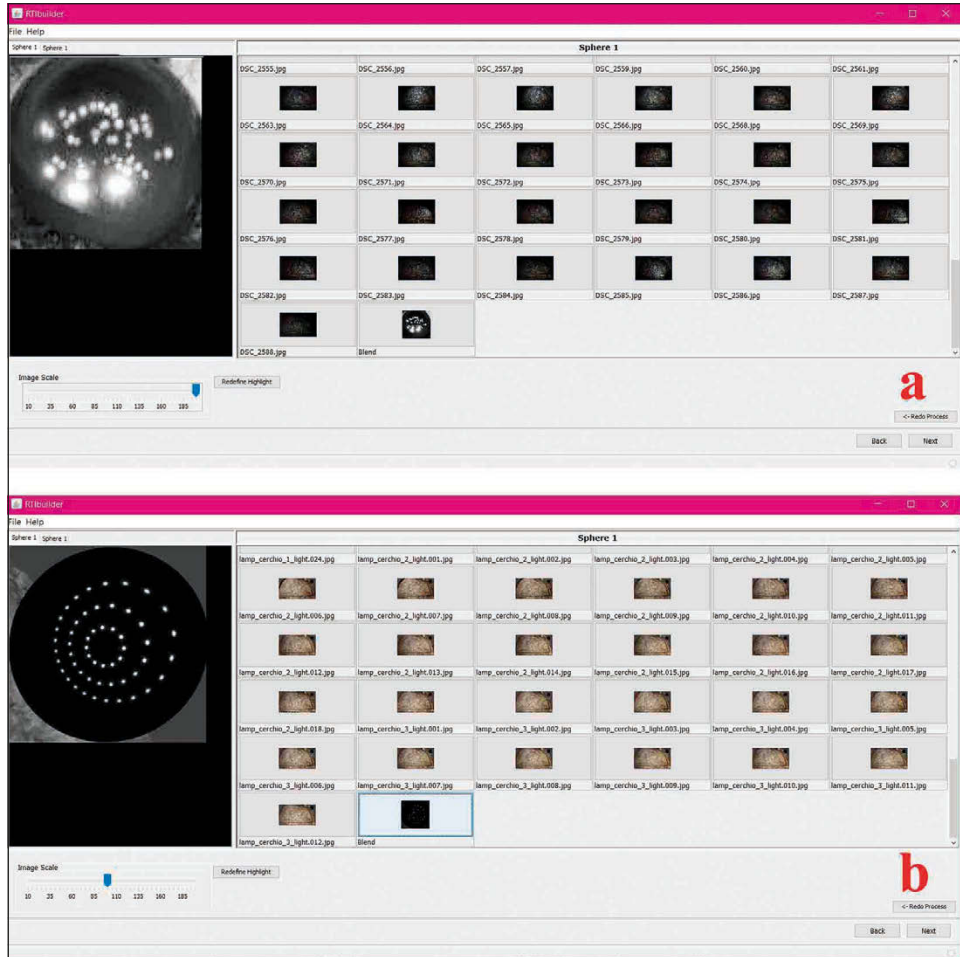


Fig. 4 – Two screenshots of the highlight detection in the RTI Builder software. a) Irregular diffusion of light in the detection of *in situ* H-RTI acquisition; b) Regular light distribution in the V-RTI process.

on the sphere. As shown in Fig. 4, the difficulties and obstacles found in the field resulted in an uneven rendering of the acquisition, clearly visible on the reflecting sphere. On the contrary, the virtual environment allowed a correct and homogeneous distribution of the light source. A marked improvement in visualisation is visible in “Default” rendering and even more so with the application of filters such as the “Specular” (Fig. 5), where the strong shadow seen in the processing from real shots gives way to a palpable emphasising of the micro-reliefs on the surface of the *arcosolium*.



Fig. 5 – Comparison between the Default and the Specular renderings in RTI Viewer on the *in situ* and Virtual elaborations (minucci-bosco-de_luca 2022).

6. CONCLUSION

In a nutshell, the H-RTI method is recommended for medium-sized and outdoor acquisitions, but it is unsuitable for complex sites due to the specific execution procedures. The use of a light dome in the D-RTI methodology allows for a controlled and stable acquisition environment, thanks to the automatic management of illumination. However, it is suitable for small objects and surfaces and is not always adapted with ease to outdoor acquisitions. The application of Virtual RTI has proven to be a valid alternative that fits into an increasingly consolidated digital survey workflow.

The advantages of the V-RTI are many: (i) since the virtual dome can be scaled and rotated to different positions, the V-RTI methodology is efficient when the object is too large for a traditional RTI acquisition or when this is geometrically complex. (ii) The virtual environment also allows to solve the problems deriving from the shape of the object, which can hinder a correct illumination, and those of the self-occlusion caused by the shadows of the illuminated target sphere that can be found on the surface of the object, thanks to the possibility of “cutting” the 3D replica as required. Furthermore (iii) the V-RTI is very useful in remote contexts, in

sites which are difficult to access or where planning an adequate Highlight Based acquisition would be tricky or too time-consuming at a logistical level and where therefore too many acquisitions are not recommended *in situ* (this is the case of the Catacombs of San Gennaro, a vast hypogeum maze characterised by special soft lighting and visited every day by large tourist flows). (iv) The V-RTI methodology also provides greater objectivity than the H-RTI methodology, since it is not necessary to select only one view of the object while in the field. (v) The opportunity to choose different shots in the virtual environment for each detail to be analysed allows for a more reflexive approach to investigations, especially in contexts where it is not possible to repeat acquisitions. Finally (vi) the surface of the objects can be resurveyed and illuminated from different positions after the acquisition of the models, allowing an almost infinite re-investigation in the light of ever new research questions.

Obviously, V-RTI is strongly affected by the resolution of the 3D model being used as a source of information. However, 3D surveying methodologies are, to date, extremely advanced and versatile, guaranteeing excellent data even in difficult environments. The possibility of using polygonal 3D information from any 3D acquisition methodology (photogrammetric, time-of-flight or phase-time laser scanner or even structured light) makes the virtual dome compatible with the most different research pipelines available. The case study made it possible to outline an overview of the methodologies under investigation and to lay the bases for the creation of a comprehensive research protocol for the use of the V-RTI technique. For this reason, the authors are working on making this digital tool available to other research groups, in order to expand the application cases and share possibilities for improvement.

ELEONORA MINUCCI, ANGELA BOSCO
Università degli Studi di Napoli L'Orientale
eminucci@unior.it, abosco@unior.it

DANIELE DE LUCA
VisitLab Cineca - Consorzio Interuniversitario
d.deluca@cineca.it

REFERENCES

- BOSCO A., MINUCCI E. 2020, *Rendering RTI ed editing d'immagine per elaborazioni SfM: Confronto tra tecniche e strumenti di visualizzazione per la documentazione di graffiti in contesto archeologico*, «Newsletter di Archeologia CISA», 11, 43-66.
- CHI – Cultural Heritage Imaging 2014, *Reflectance Transformation Imaging. Glossary of Photographic and Technical Terms for RTI* (https://culturalheritageimaging.org/What_We_Offer/Downloads/Capture/CHI-RTI-Glossary_v1.pdf).


DUFFY S.M. 2013, *Multi-light Imaging Techniques for Heritage Application*, English Heritage, London, Historic England.

EARL G., MARTINEZ K., MALZBENDER T. 2010, *Archaeological applications of polynomial texture mapping: Analysis, conservation and representation*, «Journal of Archaeological Science», 37, 8, 2040-2050.

ABSTRACT

In the field of Cultural Heritage, the technological advances of recent years have enriched and optimised the possibility of documenting and studying ancient graffiti with a wide range of low-cost and non-invasive methodologies. The most popular are digital photogrammetry SfM (Structure from Motion) and RTI (Reflectance Transformation Imaging) methodologies. The RTI is a powerful tool that, through the use of open source software, enables the documentation of data that are difficult to visualise, facilitating the recognition of traces and marks on the surface of objects. On the other hand, the SfM 3D models are increasingly replacing documentation with traditional photographs. This 'almost excessive' production of three-dimensional models is not often accompanied by an adequate exploitation of all their potential uses. This research aims to investigate the possibility of using a high-resolution 3D model for the implementation of virtual RTI processing, a hybrid method that combines 3D, virtual manipulation and 2D technologies in a fast and intuitive workflow suitable for the documentation of a wide range of archaeological monuments. The process sees the 3D model from the SfM survey being illuminated and photographed in a virtual dome in the open source Blender environment; therefore, the images generated are processed with RTI Builder software.

34.1
2023

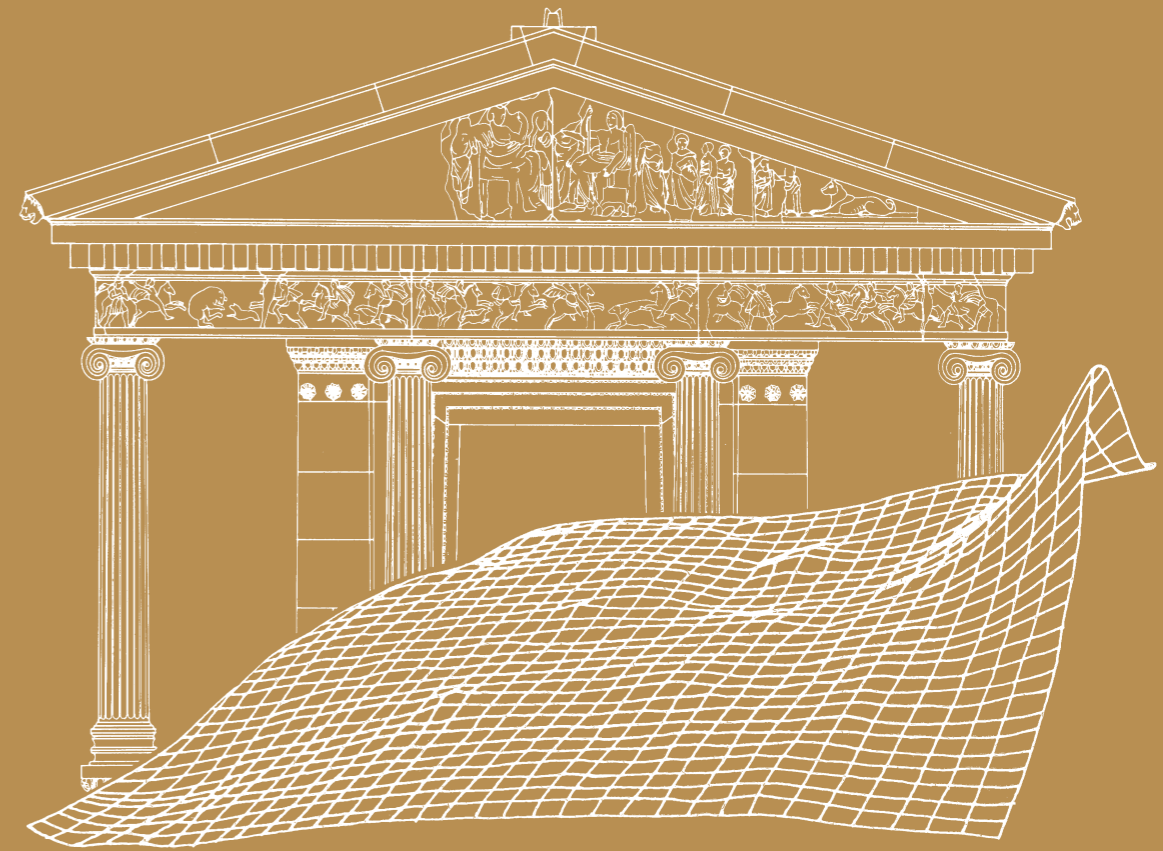

ARCHEOLOGIA E CALCOLATORI

34.1

2023

All'Insegna del Giglio

€ 40,00

ISSN 1120-6861

e-ISSN 2385-1953

ISBN 978-88-9285-204-4

e-ISSN 978-88-9285-205-1



AC-34-1

ARCHEOLOGIA
E CALCOLATORI